


HOBART

SHRINK PACKAGING SYSTEMS



1734T

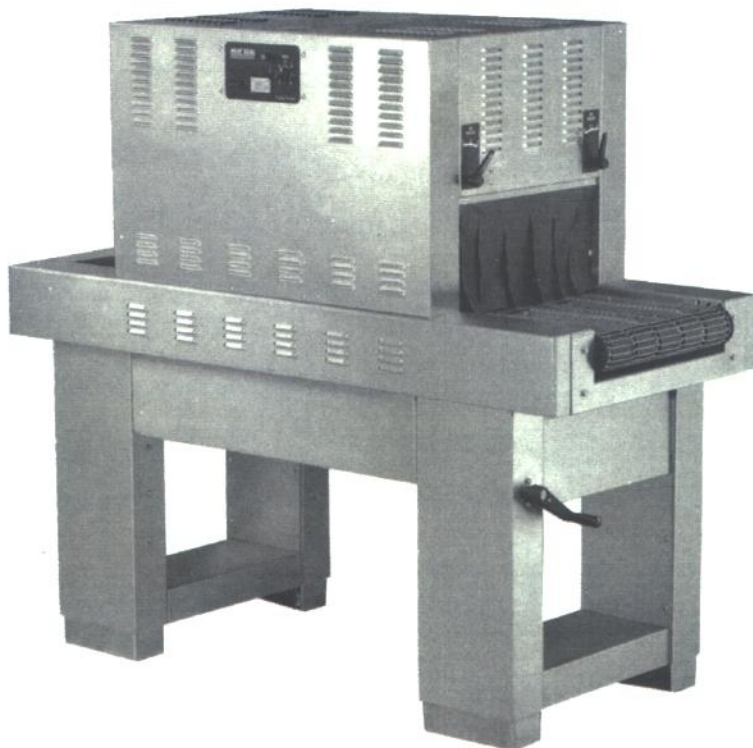

220 VOLT/8000 WATT CONSOLE SHRINK TUNNELS FEATURING


- **High Velocity Turbo Design**
- **17"W x 34"L x 8"H Tunnel Opening**
- **Dual Mechanical Air Velocity Control**
- **Works With All Shrink Films**
- **Digital Temperature Control**
- **Quick Change Live/Dead Silicone Roller Conveyor**
- **Automatic Cool Down**
- **Dual Heat Chambers**
- **Stainless Steel Model**

OTHER FEATURES

Shrinks Products Of Many Different Shapes And Sizes	•	High Quality Calrod Heating Elements
• Heavy Duty, High Temperature Blower Motors	•	Heat Sensitive Cut-Off Switch
• Heavy Gauge Steel Construction	•	Console Has Levelers and 3" Casters
• Teflon Mesh Belt Conveyor Or Steel Wire Belt Conveyor Available	•	Made In U.S.A.

1734T SPECIFICATIONS

Inside Tunnel Dimensions	17W x 34L x 8H (in)	Power Requirements	220V, 36 Amp Single Phase
	43W x 86L x 20H (cm)		Circuit with Ground
Overall Tunnel Dimensions	27W x 60L x 52H (in)	Voltage	220
	68W x 153L x 132H (cm)	Wattage	8000
Weight (Net)	500 (lbs)	Amperage	36
	227 (kg)	Conveyor	Variable Speed, Quick
Warranty	One Year Limited		Change Live/Dead Silicone
	On Parts		Covered Rollers w/2" Spacing
Recommended L Sealer	HS-1520, HS-1730SD	Conveyor Speed	0-35/70 FPM

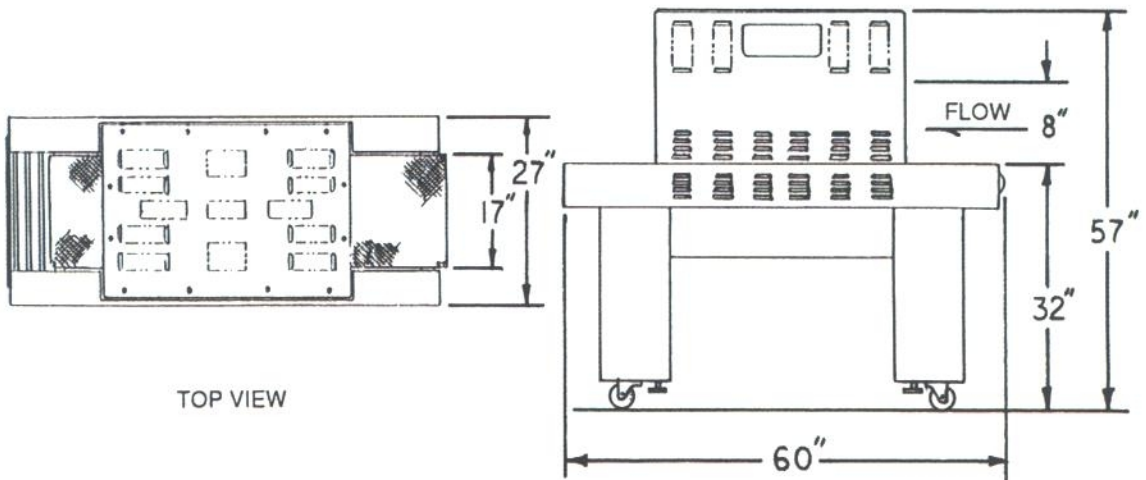

HOBART